


Hindsight 20 20[®]
Professional Value[™]

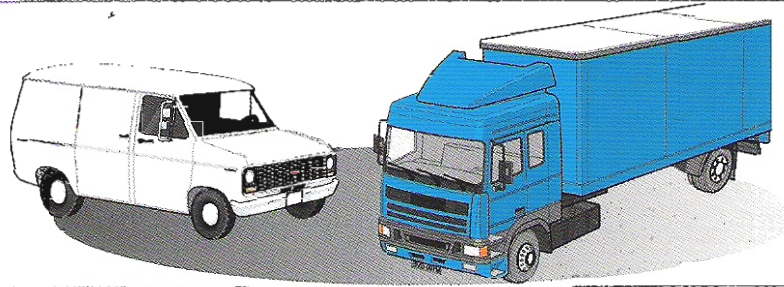


For **Commercial Straight Trucks** and **Box Vans**

CS-560

• Camera Features

- 1/32" interline transfer color CCD sensor
- Electronic auto iris control
- Auto white balance
- Back light compensation
- Wide angle for greater coverage
- Excellent high-contrast level picture
- 100% waterproof guarantee
- IEC 529 tested and approved housing
- IP Rating: 67
- G-Force Rating: 10
- Durable aluminum diecast housing

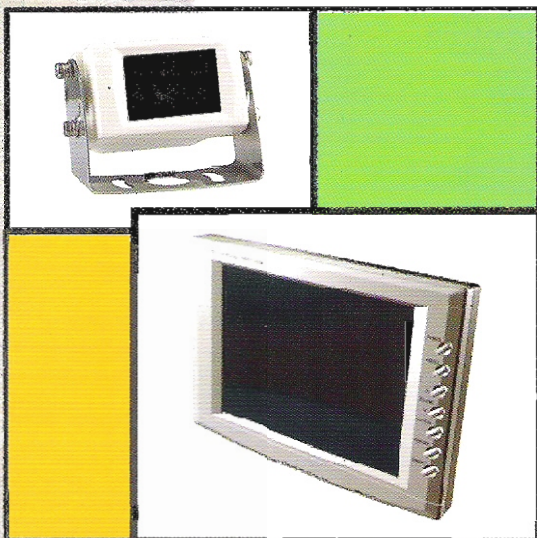

Fleet-Duty Camera
and 5.6 Inch Monitor

• Monitor Features

- Color Active matrix TFT-LCD Monitor
- 960 x 234 pixels
- Compact design, mountable on the dash
- 10 ~ 32 V DC Free voltage operation
- Auto power on in Reverse gear
- Two camera inputs
- Front panel controls
- A/V Input for DVD/VCD/VTR

**Give Your Drivers A
Professional Tool To
See, Hear and Qualify Obstacles**

**Enable Them &
Avoid Collisions**

* For Technical Specifications Please See Reverse

Camera:

Specifications:

	CC-77 (Color)
Signal Format	NTSC or PAL
Image Device	1/3" Interline Transfer Color CCD
Picture Element	270,000(NTSC) or 290,000(PAL) Pixels
Synchronization	Internal SYNC.
Resolution	380 TV Line
S/N Ratio	More Than 48dB
Min. Illumination	1.0Lux/IR on 0.001Lux
Video Output	75 ohms 1Vp-p Composite Signal
Audio Output	600 ohms 50mVrms +/- 10%
Iris	Electronic auto iris system
Operating Voltage Range	7.5V ~15V
Lens	F=2.0/f=3.0mm Diagonal 130°
Dimension	69(W) X 61(D) X 60(H)
Operating Temperature	-30°C ~ +60°C / -50°C ~ 60°C(W/Heat)
Weight	0.42 Kg
Supplied Accessories	20m Water-Proof Cable
Warranty	1 year

Monitor:

Specifications:

	STM-5600 (LCD)
System	NTSC or PAL Factory Mode Select
Power Supply	DC10V ~32V
Power Consumption	14W
Operating Temperature	-15°C ~ +60°C (+5°F to +140°F)
LCD	5.6" TFT LCD Color
Camera Input	4P Mini Din Jack(A/V/B+) / RCA
Dimensions	165(W) X 116(D) X 28(H)mm, 6.5(W) X 4.5(D) X 1.1(H) Inch
Weight	1.32lbs (0.6 kg)
Supplied Accessories	Monitor Stand (With Acc'y)
Warranty	1 year

ELECTRICAL CONNECTION

